



Resilient Floor Care: Scrub/Recoat

TOOLS & EQUIPMENT



RECOMMENDED PRODUCTS



A Industrial Pathmaker

B Choose your preferred Spartan floor finish




1 Apply PPE and gather supplies. Supplies may include auto scrubber or bucket, floor machine, appropriate pad, and wet vacuum.



2 Place "Wet Floor" signs at each entrance.



3 Dust mop floor.

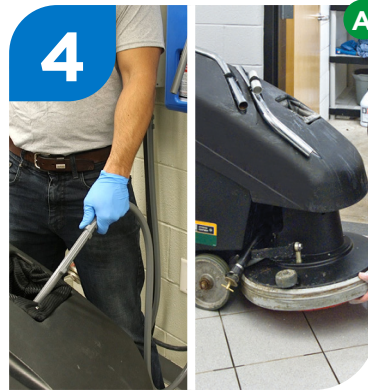

4 Fill auto scrubber with properly diluted top scrub cleaner. Scrub the floor using auto scrubber and the appropriate red, blue, or surface prep pad.



5 Pick up the dirty solution and rinse the floor with clean water. Repeat this process as necessary until all embedded soils are removed.




6 For smaller areas, mop on top scrub solution and scrub with 175 RPM machine.



7 Wet vacuum the solution.



8 Damp mop edges and any residue left on floor. Repeat this process as necessary until all residual soils are removed. Make sure to wipe down baseboards.

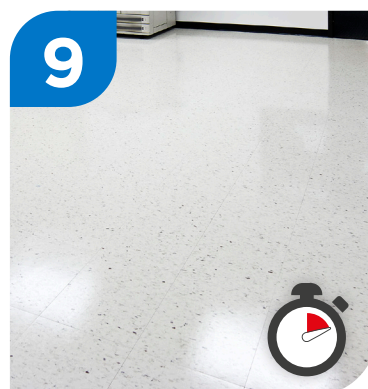

9 Allow the floor to dry thoroughly.



10 Pour floor finish into a bucket, as directed on product label. *Note: Conventional mops require a lined bucket. Microfiber application systems do not.*



11 Dip the mop into floor sealer and wring out to keep mop from dripping.



12 Start at the far corner from entrance and frame a 10' x 10' area with mop.



13 Use a figure-eight pattern, turning the mop frequently, to apply the sealer all the way to the baseboard.



14 Work backward and side-by-side toward the entrance, in sections, until the floor area is completely sealed.



15 Allow the sealer/finish to dry thoroughly after each coat.



16 After the floor is dry, repeat this process as directed by product label to achieve desired number of coats.



17 Clean and return all equipment to storage. Remove and store "Wet Floor" signs when floor is completely dry.



Spartan Chemical Company, Inc.
www.spartanchemical.com

SERVICE/TECHNICAL SUPPORT
1-800-537-8990

SPARTAN MEDICAL EMERGENCY
1-888-314-6171